


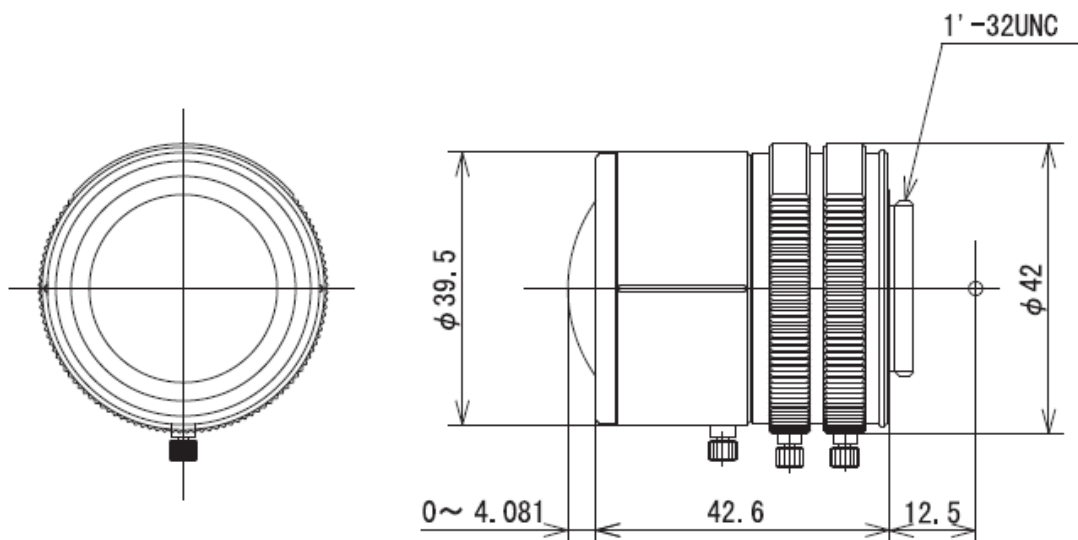

1/3" 1.4/2.5 ~ 6mm CS

FOCAL LENGTH	f=2.5~6mm	
MAX. DIAMETER (RATIO)	F=1:1.4~16~CLOSE	
ELEMENT	6GROUP 7ELEMENTS (1ASP.)	
PICTURE SIZE	3.6x4.8mm 1/3"	
ANGLE OF VIEW	VER.	80.9 ° ~ 34.2 °
	HOR.	107.6 ° ~ 45.6 °
	DIA.	133.3 ° ~ 56.8 °
DISTORTION	-19.4% ~ -2.5%	
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	364mm ~ 131mm
	HOR.	584mm ~ 179mm
	DIA.	995mm ~ 230mm
MINIMUM FOCUS DISTANCE	0.2m	
FLANGE BACK	12.5mm	in air
BACK FOCUS	8.72mm ~ 14.24mm	in air
FILTER SCREW SIZE	—	
FRONT/REAR EFFECTIVE DIA.	$\phi 27.6$ mm	$\phi 7.4$ mm
MOUNT	CS-MOUNT	
EXIT PUPIL	W18583 ~ T-30mm	
TEMPERATURE RANGE	-10 ~ 45 °C	
STORAGE TEMPERATURE RANGE	-40 ~ 60 °C	
RESOLUTION	100 lp/mm (Center)	40 lp/mm (Corner)
STOPPER STRENGTH	10kgf/cm	
ENDURANCE TESTS	F:5,000Times	Z:5,000Times I:5,000Times
WEIGHT	83g	

		1/1		
		1/3" 1.4/2.5~6mm		
		LMVZ256		
96.8.19				