




$\phi 16$ 1.8/25mm C			
FOCAL LENGTH		$f=25\text{mm}$	
MAX. DIAMETER (RATIO)		$F=1:1.8\sim 16$	
ELEMENT		6 GROUPS 8 ELEMENTS	
PICTURE SIZE		12.8x9.6mm	
ANGLE	VER. ANGLE	21.8°	
	HOR. ANGLE	28.9°	
	DIA. ANGLE	35.8°	
DISTORTION (TV)		-0.34%	
SHOOTING RANGE AT	VER.	64mm	
	HOR.	86mm	
	DIA.	108mm	
MINIMUM FOCUS DISTANCE		0.15m	
FLANGE BACK		17.526mm in air	
BACK FOCUS		24.3mm in air	
FILTER SCREW SIZE		M34x0.5	
FRONT/REAR EFFECTIVE DIA.		FRONT $\phi 27\text{mm}$	REAR $\phi 18.2\text{mm}$
MOUNT		C-MOUNT	
EXIT PUPIL		-63.9mm	
TEMPERATURE RANGE		-10~+50° C	
STORAGE TEMPERATURE RANGE		-20~+60° C	
RESOLUTION CENTER/CORNER		CENTER 160L/mm	CORNER 120L/mm
LENS COATING		WIDE BAND MULTI COATING	
WEIGHT		g	

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

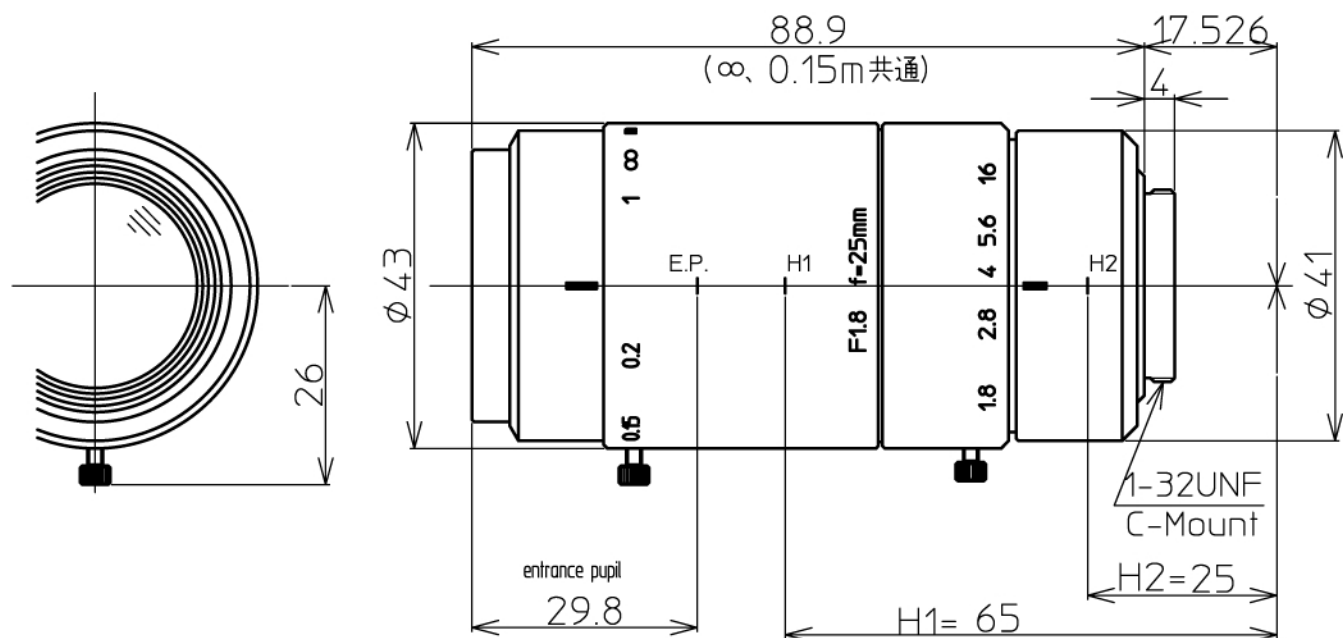

		尺 度	1/1	承 認	八木	製 図	大口
		LM25SC					
		1" F1.8 f=25mm					
2013.05.10	作成年月日						