




2/3" 1.8/16mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=16mm		
MAX. DIAMETER (RATIO)		F=1:1.8~16		
ELEMENT		8 GROUPS 10 ELEMENTS		
PICTURE SIZE		6.6×8.8mm	5.4×7.2mm	4.8×6.4mm
ANGLE	VER. ANGLE	22.7°	18.6°	16.6°
	HOR. ANGLE	30.0°	24.7°	22.0°
	DIA. ANGLE	37.1°	30.7°	27.4°
DISTORTION (TV)		-0.20%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	45.7mm	37.3mm	33.1mm
	HOR.	61.1mm	49.9mm	46.3mm
	DIA.	76.5mm	62.5mm	55.5mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526 mm in air		
BACK FOCUS		14.6mm in air		
FILTER SCREW SIZE		M25.5×0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT φ21.2mm REAR φ13.4mm		
MOUNT		C-MOUNT		
EXIT PUPIL		-54.2mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 200lp/mm CORNER 140lp/mm		
LENS COATING		WIDE BAND MULTI COATING		
WEIGHT		90 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

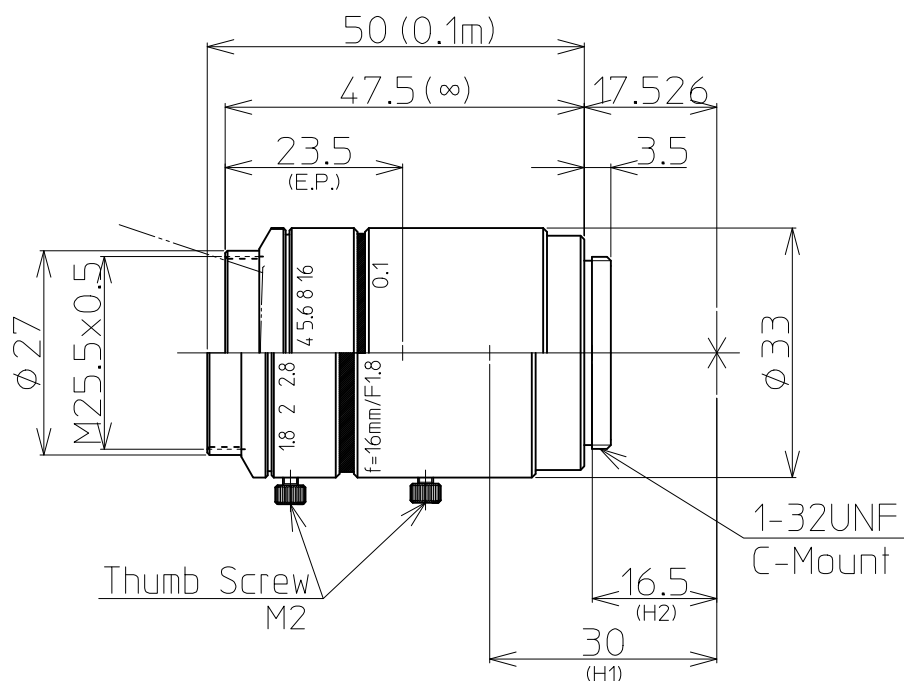

		尺 度	1/1	工場 番号	LR1012KW
		機 種 名	2/3" F1.8 f=16mm		
2014.12.25	更新	機 種 番	LM16JC10M 外觀図		
2013.4.15	作成年月日				