




2/3" 1.4/16mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=16mm		
MAX. DIAMETER (RATIO)		F=1:1.4~16		
ELEMENT		7 GROUPS 8 ELEMENTS		
PICTURE SIZE		6.6x8.8mm	5.4x7.2mm	4.8x6.4mm
ANGLE	VER. ANGLE	23.2°	19.0°	16.9°
	HOR. ANGLE	30.9°	25.4°	22.6°
	DIA. ANGLE	38.4°	31.6°	28.2°
DISTORTION (TV)		-0.8%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	127.4mm	103.9mm	92.2mm
	HOR.	171.4mm	139.3mm	123.5mm
	DIA.	216.8mm	175.5mm	155.3mm
MINIMUM FOCUS DISTANCE		0.3m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		14.7mm in air		
FILTER SCREW SIZE		M27x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT $\phi 14.5$ mm REAR $\phi 14.5$ mm		
MOUNT		C-MOUNT		
EXIT PUPIL		-1067.4mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 120本/mm CORNER 80本/mm		
WEIGHT		100 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

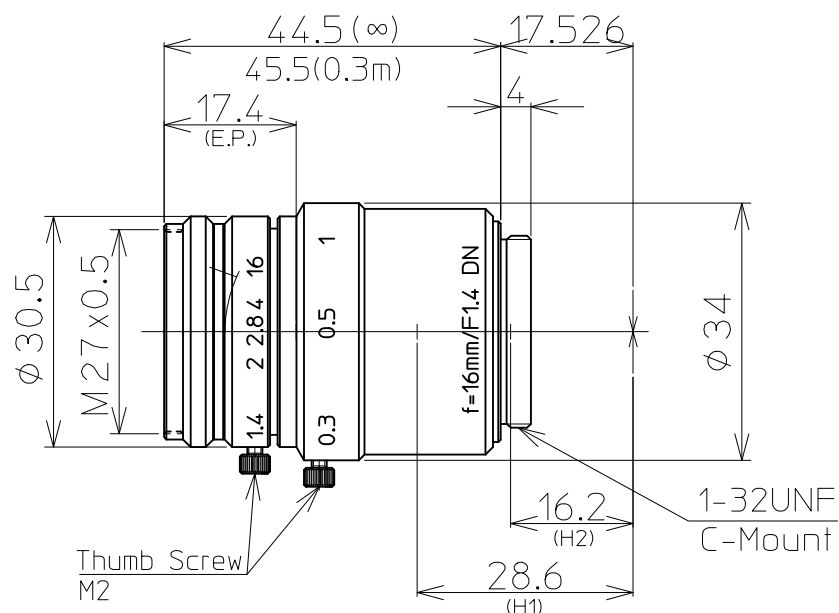

		尺 度	1/1	工場 番号	1066NC
2019.12.02	外径寸法追記	機 種 名	2/3" F1.4 f=16mm		
2016.10.12	更新				
2015.4.21	更新	機 種 番	LM16JC5M-IR		
2010.10.2	作成年月日				