




1" 1.4/25mm C		1"	2/3"	1/1.8"
FOCAL LENGTH		f=25mm		
F-NUMBER		F=1:1.4,2.8,4,8		
PICTURE SIZE		9.6x12.8mm	6.6x8.8mm	5.4x7.2mm
ANGLE OF VIEW (∞)	VER. ANGLE	22.0°	15.1°	12.4°
	HOR. ANGLE	29.3°	20.2°	16.5°
	DIA. ANGLE	36.6°	25.2°	20.6°
DISTORTION (TV)		-1.0%	-0.5%	-0.3%
FIELD OF VIEW (MINIMUM FOCUS DISTANCE)	VER.	119.2mm	81.4mm	66.5mm
	HOR.	160.7mm	109.1mm	88.9mm
	DIA.	204.3mm	137.4mm	111.7mm
MINIMUM FOCUS DISTANCE		0.3m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		16.5mm in air		
FILTER SCREW SIZE		M35.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 21.0mm		REAR ϕ 19.4mm
MOUNT		C-MOUNT		
EXIT PUPIL		-57.9mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 120lp/mm		CORNER 100lp/mm
WEIGHT		104g		

NOTE: Specifications and availability are subject to change without notice

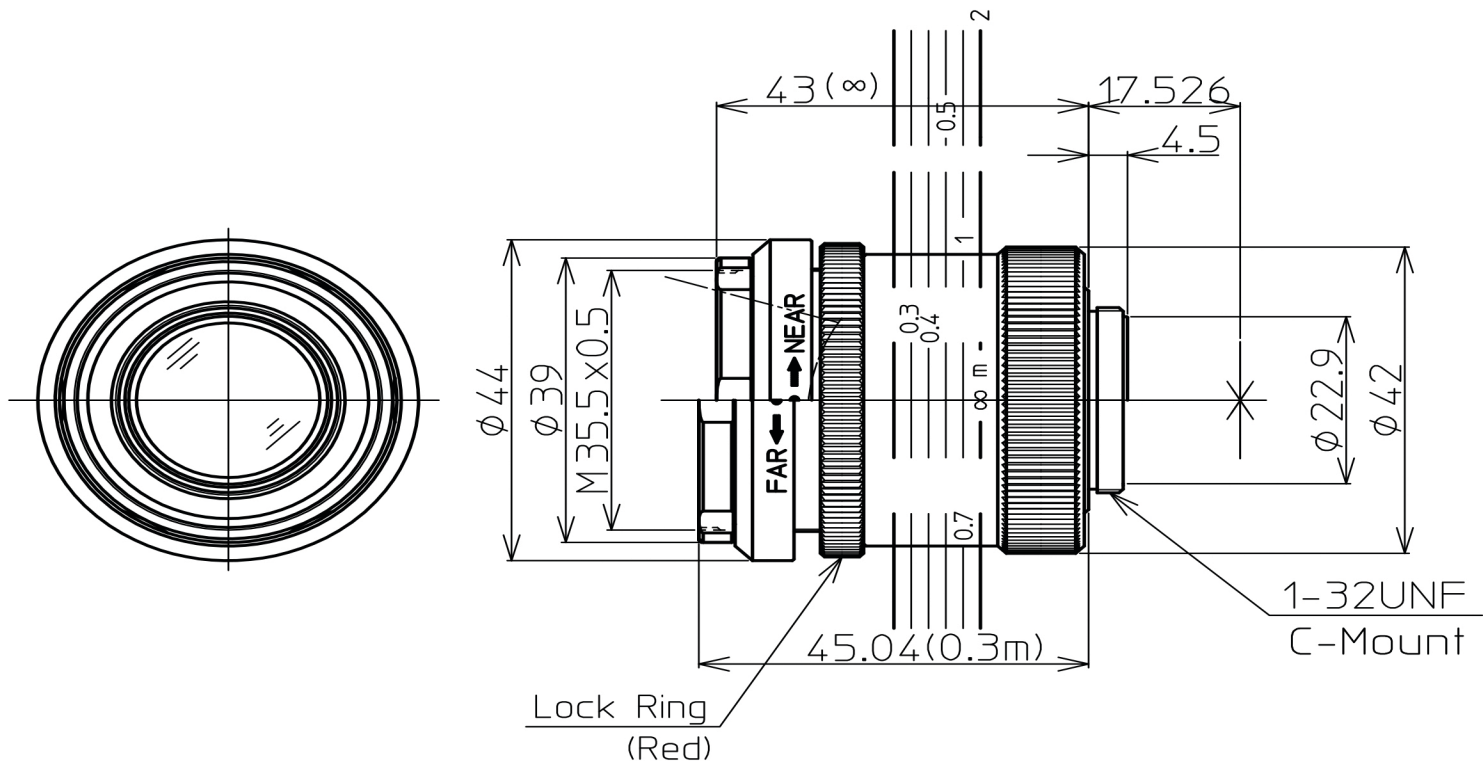

WWW.KOWA.HK

		1/1	
		F1.4/f25mm	
2016.2.8		LM25HC-V	
2015.9.8			