




| 2/3" 1.6/25mm C                                |            | 2/3"                | 1/1.8"    | 1/2"               |
|------------------------------------------------|------------|---------------------|-----------|--------------------|
| FOCAL LENGTH                                   |            | f=25mm              |           |                    |
| MAX. DIAMETER (RATIO)                          |            | F=1:1.6~16          |           |                    |
| ELEMENT                                        |            | 7 GROUPS 9 ELEMENTS |           |                    |
| PICTURE SIZE                                   |            | 6.6x8.8mm           | 5.4x7.2mm | 4.8x6.4mm          |
| ANGLE                                          | VER. ANGLE | 15.0°               | 12.3°     | 10.9°              |
|                                                | HOR. ANGLE | 19.9°               | 16.4°     | 14.6°              |
|                                                | DIA. ANGLE | 24.8°               | 20.4°     | 18.0°              |
| DISTORTION (TV)                                |            | -0.01%              |           |                    |
| SHOOTING RANGE AT<br>MINIMUM FOCUS<br>DISTANCE | VER.       | 26.3mm              | 21.5mm    | 19.1mm             |
|                                                | HOR.       | 35.1mm              | 28.7mm    | 25.5mm             |
|                                                | DIA.       | 43.9mm              | 35.9mm    | 31.9mm             |
| MINIMUM FOCUS DISTANCE                         |            | 0.1m                |           |                    |
| FLANGE BACK                                    |            | 17.526mm in air     |           |                    |
| BACK FOCUS                                     |            | 11.2mm in air       |           |                    |
| FILTER SCREW SIZE                              |            | M30.5x0.5           |           |                    |
| FRONT/REAR EFFECTIVE DIA.                      |            | FRONT $\phi$ 20.0mm |           | REAR $\phi$ 13.8mm |
| MOUNT                                          |            | C-MOUNT             |           |                    |
| EXIT PUPIL                                     |            | -46.6mm             |           |                    |
| TEMPERATURE RANGE                              |            | -10~+50°C           |           |                    |
| STORAGE TEMPERATURE RANGE                      |            | -20~+60°C           |           |                    |
| RESOLUTION CENTER/CORNER                       |            | CENTER 160本/mm      |           | CORNER 100本/mm     |
| WEIGHT                                         |            | 115 g               |           |                    |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

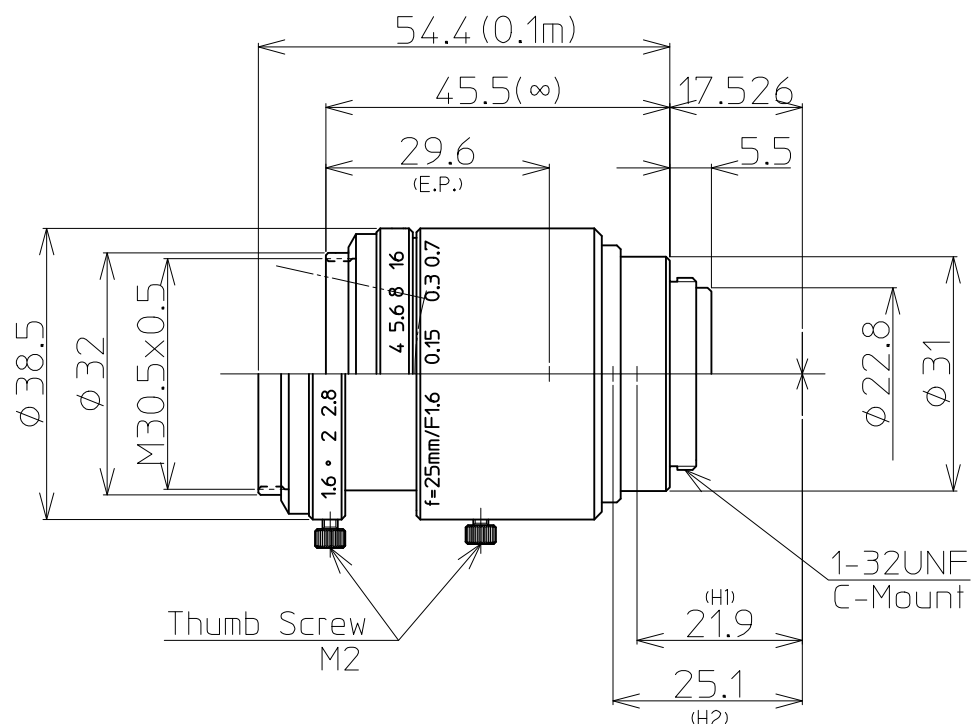

|            |             |             |                  |          |        |
|------------|-------------|-------------|------------------|----------|--------|
|            |             | 尺<br>度      | 1/1              | 工場<br>番号 | CH1054 |
|            |             | 機<br>種<br>名 | 2/3" F1.6 f=25mm |          |        |
| 2017.04.28 | 更新 (彫刻誤記訂正) | 機<br>種<br>番 | LM25JC5M2 外觀図    |          |        |
| 2014.12.25 | 更新          |             |                  |          |        |
| 2013.4.15  | 作成年月日       |             |                  |          |        |