




2/3" 2.0/35mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=35mm		
MAX. DIAMETER (RATIO)		F=1:2.0~22		
ELEMENT		6 GROUPS 8 ELEMENTS		
PICTURE SIZE		6.6×8.8mm	5.4×7.2mm	4.8×6.4mm
ANGLE	VER. ANGLE	10.5°	8.3°	7.6°
	HOR. ANGLE	13.9°	11.4°	10.2°
	DIA. ANGLE	17.4°	14.3°	12.7°
DISTORTION (TV)		-0.3%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	56.6mm	46.3mm	41.2mm
	HOR.	75.8mm	62.0mm	55.0mm
	DIA.	95.2mm	77.6mm	68.9mm
MINIMUM FOCUS DISTANCE		0.3m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		19.2mm in air		
FILTER SCREW SIZE		M30.5×0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ø19.7mm		REAR ø14.7mm
MOUNT		C-MOUNT		
EXIT PUPIL		-65.8mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 120本/mm		CORNER 80本/mm
WEIGHT		100 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

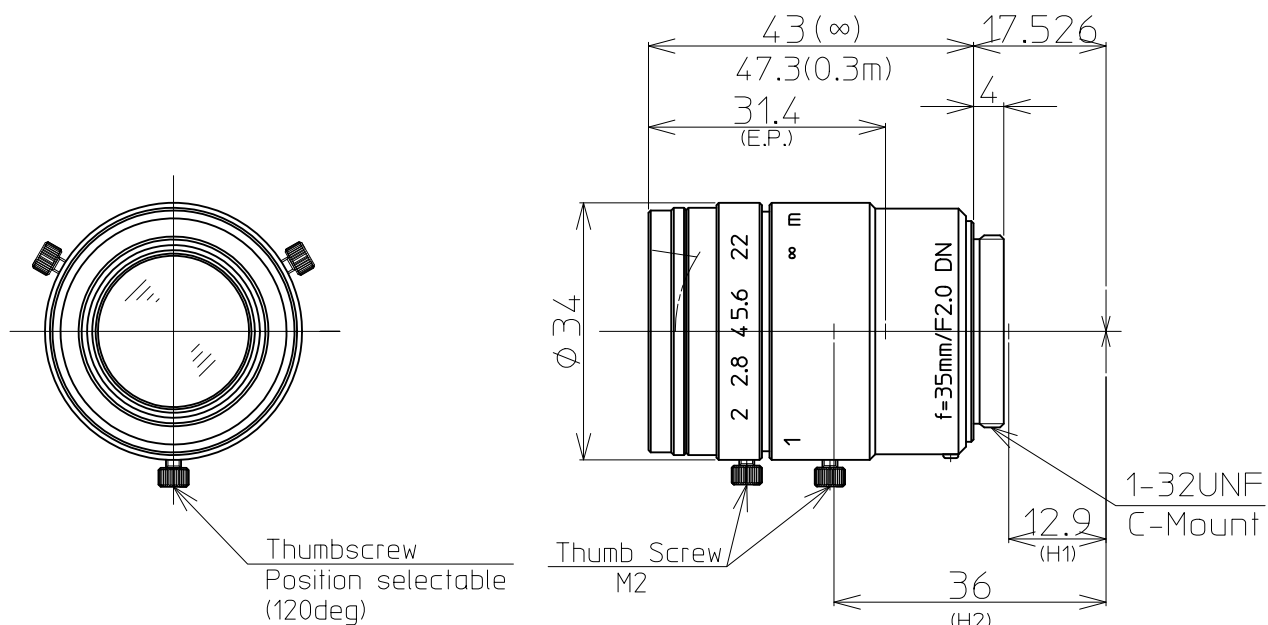

		尺 度	1/1	工場 番号	1068NC
2018.06.01	3H対応	機 種 名	2/3" F2.0 f=35mm	LM35JC5M-IR	
2016.10.12	更新				
2015.4.21	更新	機 種 番			
2010.10.2	作成年月日				