




2/3" 1.8/5mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=5mm		
MAX. DIAMETER (RATIO)		F=1:1.8~16		
ELEMENT		8 ELEMENTS 9 GROUPS		
PICTURE SIZE		6.6x8.8mm	5.4x7.2mm	4.8x6.4mm
ANGLE	VER. ANGLE	66.5°	56.5°	51.1°
	HOR. ANGLE	82.2°	71.1°	64.9°
	DIA. ANGLE	95.4°	83.5°	76.8°
DISTORTION (TV)		-0.33%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	147.0mm	120.1mm	106.8mm
	HOR.	197.0mm	160.5mm	142.5mm
	DIA.	249.7mm	201.7mm	178.6mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		10.3mm in air		
FILTER SCREW SIZE		M46x0.75		
FRONT/REAR EFFECTIVE DIA.		FRONT φ27.5mm REAR φ14.3mm		
MOUNT		C-MOUNT		
EXIT PUPIL		332.4mm		
TEMPERATURE RANGE		-10~+50° C		
STORAGE TEMPERATURE RANGE		-20~+60° C		
RESOLUTION CENTER/CORNER		CENTER 200本/mm CORNER 140本/mm		
LENS COATING		WIDE BAND MULTI COATING		
WEIGHT		120g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

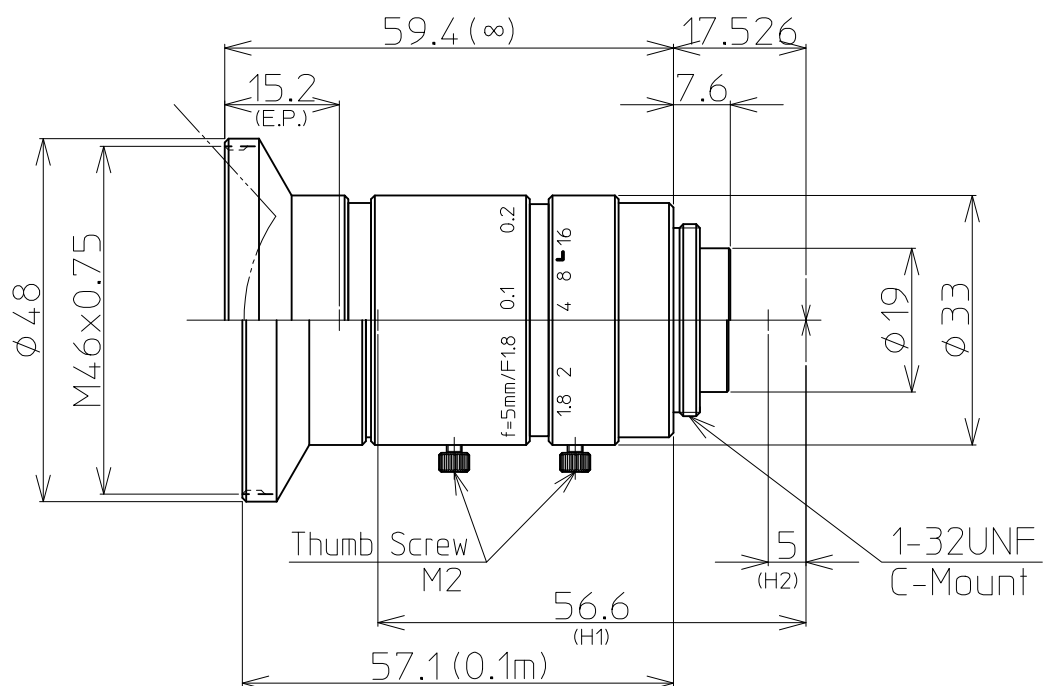

		尺 度	1/1	工場 番号	LR1027KW
		機 種 名	2/3" F1.8 f=5mm		
2014.12.25	更新	機 種 番	LM5JC10M 外觀図		
2013.4.15	作成年月日				