



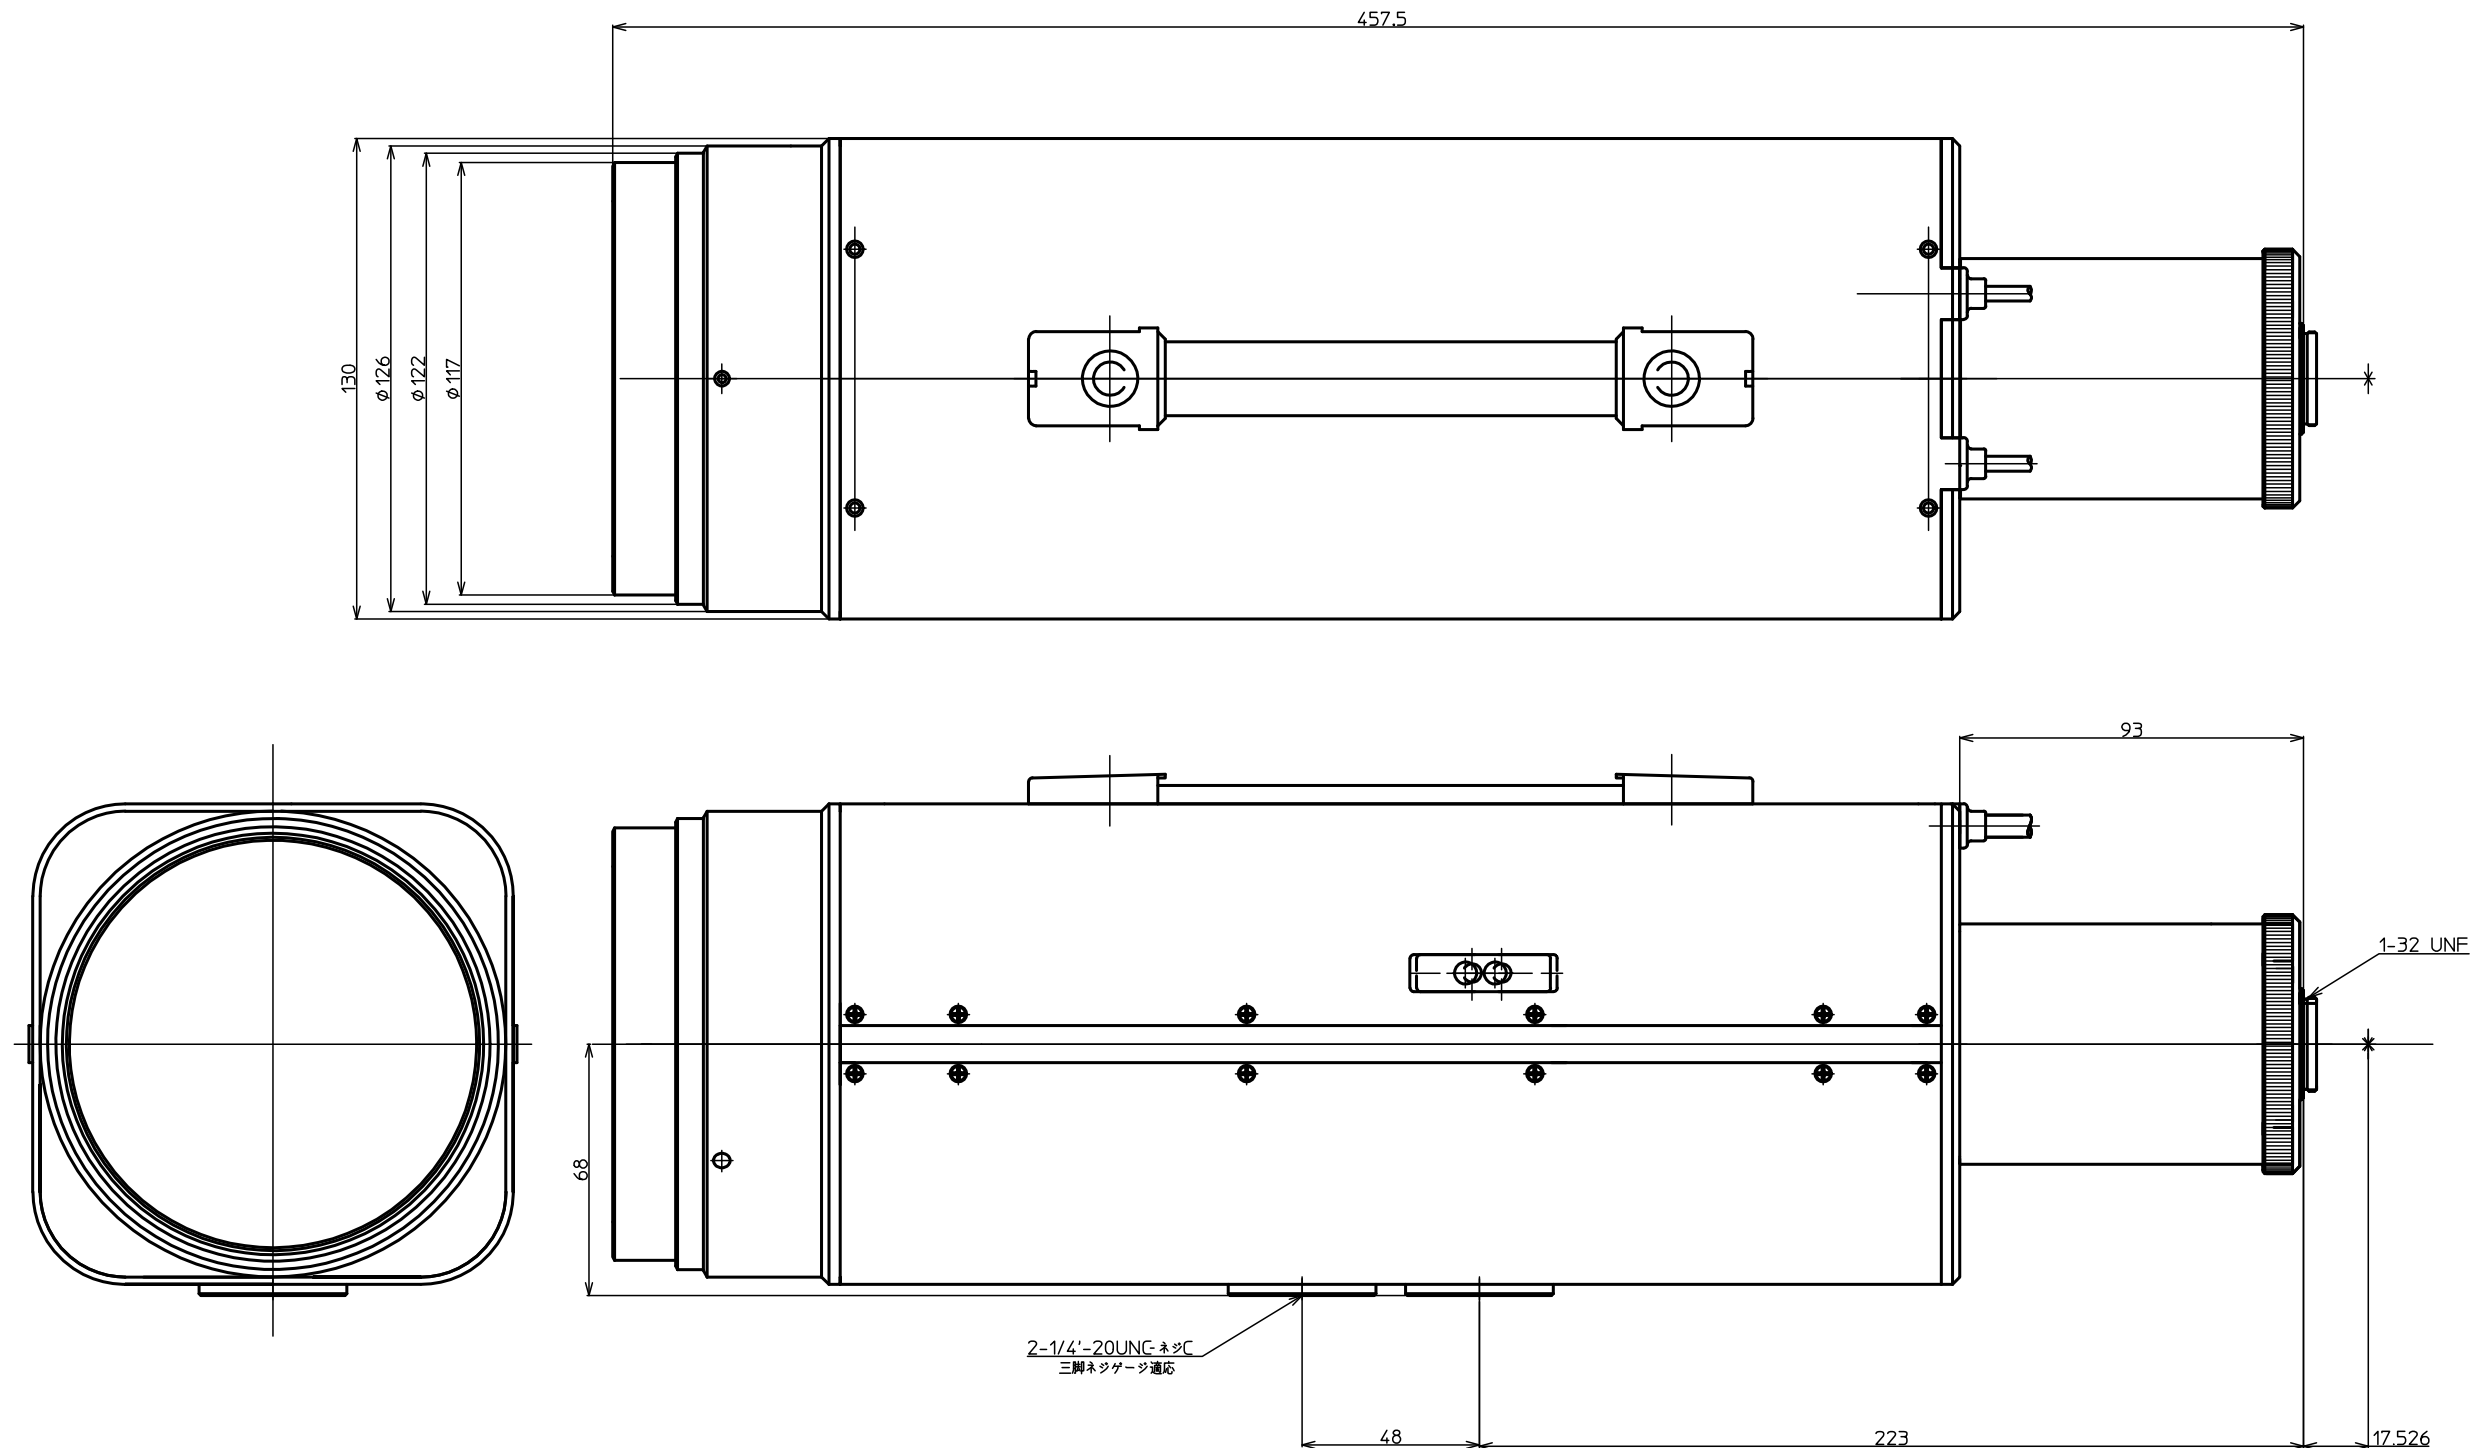


① IRIS CABLE (+) RED INPUT VOLTAGE
(-) BLACK GROUND
WHITE VIDEO SIGNAL
GREEN REMOTE CONTROL

② MOTOR CABLE (+) GREEN FOCUS NEAR
(+) BLACK FOCUS FAR
(+) YELLOW ZOOM IN
(+) RED ZOOM OUT

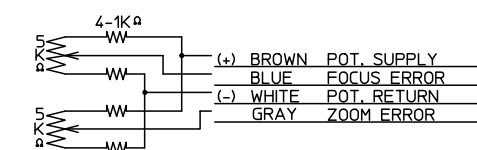

SPECIFICATION			
1. USE	FOR 1/2" COLOR B/W CAMERA		
2. FOCAL LENGTH	f=20~1000mm		
3. IRIS RANGE	F= 3.5 ~ 720		
4. IMAGE SIZE	φ 8 (6.4 × 4.8)		
5. BACK FOCAL LENGTH	23.91 mm in air		
6. FLANGE FOCAL LENGTH	17.526 mm in air		
7. FOCUS RANGE	∞ ~ 5.0 m		
8. FIELD ANGLE	DIA. 1/2" (φ 22.5) (H) 0.47° (V) 0.72° (H) 0.35° (V) 0.38° (H) 0.28° (V) 0.39° (H) 0.28° (V) 0.39° (H) 0.28° (V)		
9. DISTORTION (TV)	-0.24% -0.09% -0.05% -0.01%		
10. LENS CONSTRUCTION	14 GROUPS 20 ELEMENTS		
11. CLEAR APERTURE	FRONT φ 110.0 REAR φ 15.8		
12. WEIGHT	5.5Kg		

DC (DIRECT CONTROL)			
DRIVE COIL	RESISTOR	190Ω 00:0	
	COLOR	RED(+) 3pin	
		BLACK 4pin	
BRAKE COIL	RESISTOR	1150Ω 00:0	
	COLOR	YELLOW(+) 2pin	
		GREEN 1pin	
DRIVE VOLT.	OPEN	LESS THAN +4V	
	CLOSE	OVER THAN 0V	
		W/CLOSING SPRING	



φ 1/2" F3.5/20-1000mm
LMZ1000AM LMZ1000AMP
LMZ1000AMDC LMZ1000AMPDC